

# LED CORD DIMMER 80VA/W

Cod. CFG-CO2

This cord dimmer has been specially designed for dimmable LED and incandescent lamps with a capacity of 3 Watt to a maximum of 80 Watt, but is of course also suitable for incandescent and halogen lamps up to 100 Watt.

- Integrated load failure protection (LFP)
- For flat and round cables
- Min and Max brightness adjustments to avoid flickering
- Speed adjustments to control the speed of dimming
- Terminal design for easy installation




## Specs

Rated input voltage	220-240 Vac, 50Hz
Power range	3-80W @220-240V LED 10-100W@220-240V INC, HAL
Type of load	LED Retrofit   Incandescent-halogen
Dimming	Push button
Ambient temperature (Ta)	35 °C
Cables section	0,75 mm <sup>2</sup>
Dimension	32.50mm*20.40mm*65.60m
Item weight	24.9g

## Installation

1. Unscrew the closing screws E
2. Take out the front cover A and the knob B
3. Unscrew the cord anchorage C
4. Strip the cable to be connected
5. Connect supply cable to the terminals L and N of the electronic board.
6. Connect lamp cable to the terminal identified by symbol of the electronic board.
7. Mount cord anchorage C
8. Mount front A and back D, screwing the screws E.

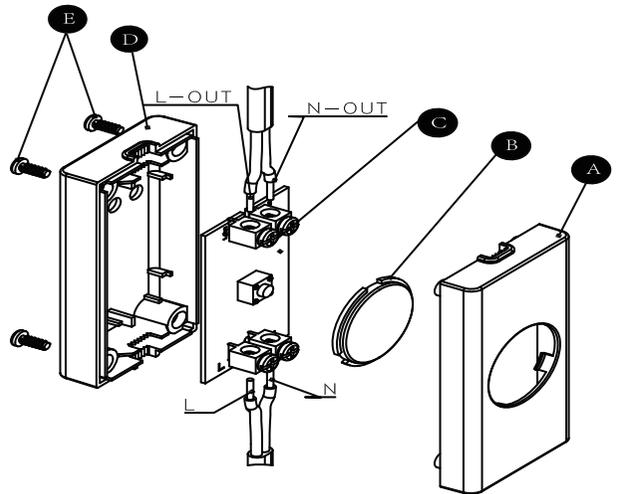

## Operation

1. ON and OFF
  - quick press to on/off and push button to dim
2. MIN. MAX. settings
  - clockwise to increase the brightness
  - anti-clockwise to decrease the brightness
3. SPEED setting
  - clockwise to increase the dimming speed
  - anti-clockwise to decrease the dimming speed

